


SMD 32.768kHz Crystal Oscillators

3C Series SMD 3225 32.768kHz Crystal Oscillator 32.768kHz O: CMOS Size: 3.2×2.5×1.00 mm

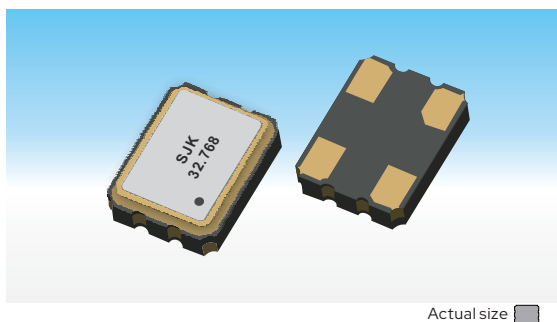

Features


- 3225 size, 0.7mm high. Ultra miniature and lightweight SMD 32.768kHz crystal oscillators
- 3-state function
- Supply voltage: 1.8V~3.3V
- 32.768kHz reference frequency output
- Low jitter provides for high performance
- Application for RTC reference clock, Wearable device, RTC module, IoT, Health and wellness monitors, Watch, etc
- RoHS Compliant / Pb Free



Standard Specifications

Item	Type	3C Series SMD 3225 32.768kHz Crystal Oscillator
Output Type		CMOS
Load condition		15pF, or specify
Frequency Range		32.768kHz
Supply Voltage		1.8V~3.3V
Frequency Stability (All Condition)		±10ppm, ±20ppm, ±25ppm, ±30ppm, ±50ppm, or specify
Current Consumption		300μA max.
Stand-by Current		3μA max.
Symmetry		45~55%
0 Level Output Voltage (V _{OL})		0.1 Vcc max.
1 Level Output Voltage (V _{OH})		0.9 Vcc min.
Rise Time / Fall Time		20ns max.
OE Pin 0 Level Input Voltage (V _{IL})		0.2Vcc max.
OE Pin 1 Level Input Voltage (V _{IH})		0.8Vcc min.
Start-up Time		5ms max.
Operating Temperature Range		-20~+70°C, -40~+85°C, or specify
Storage Temperature Range		-55~+125°C
Phase Jitter (12KHz~20MHz)		1ps max.

Dimensions

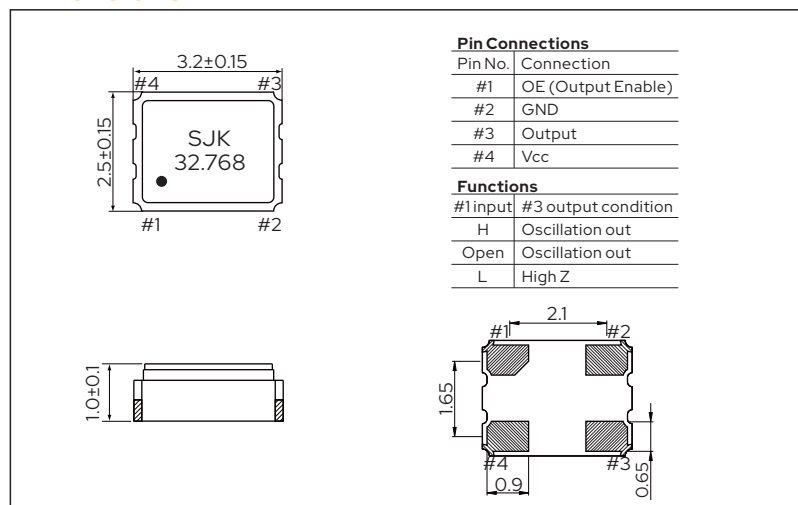

Recommended Land Pattern [mm]

