


SPXO /SMD Crystal Oscillator

ON Series SMD 1612 Crystal Oscillator

1~156.25MHz

O: CMOS

Size: 1.6×1.2×0.6mm

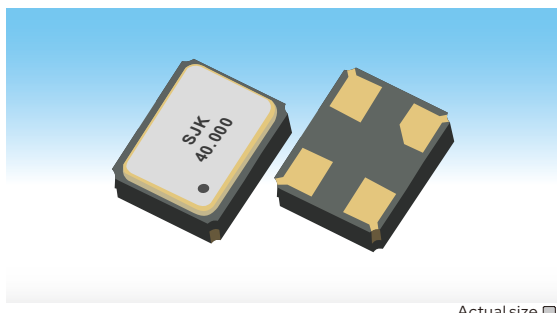

Features


- 1612 size, 0.6mm high. Ultra miniature and lightweight SMD crystal oscillators
- 3-state function
- Supply voltage: 1.8V~3.3V
- Available frequency range: 1MHz~156.25MHz
- Low jitter provides for high performance
- Application for smart phone, WiLAN, WiMAX, Bluetooth, PC, PC peripherals, Automotive multimedia device, etc
- RoHS Compliant /Pb Free



Standard Specifications

Item	Type	ON Series SMD 1612 Crystal Oscillators
Output Type		CMOS
Load condition		15pF, or specify
Frequency Range		1MHz~156.25MHz
Supply Voltage		1.8V~3.3V
Frequency Stability (All Condition)		±20ppm, ±25ppm, ±30ppm, ±50ppm, or specify
Current Consumption		10mA max.
Stand-by Current		10μA max.
Symmetry		45~55%
0 Level Output Voltage (V _{OL})		0.1 V _{CC} max.
1 Level Output Voltage (V _{OH})		0.9 V _{CC} min.
Rise Time / Fall Time		5.0ns max.
OE Pin 0 Level Input Voltage (V _{IL})		0.3V _{CC} max.
OE Pin 1 Level Input Voltage (V _{IH})		0.7V _{CC} min.
Start-up Time		10ms max.
Operating Temperature Range		-20~+70°C, -40~+85°C, or specify
Storage Temperature Range		-55~+125°C
Phase Jitter (12KHz~20MHz)		1ps max.

Dimensions

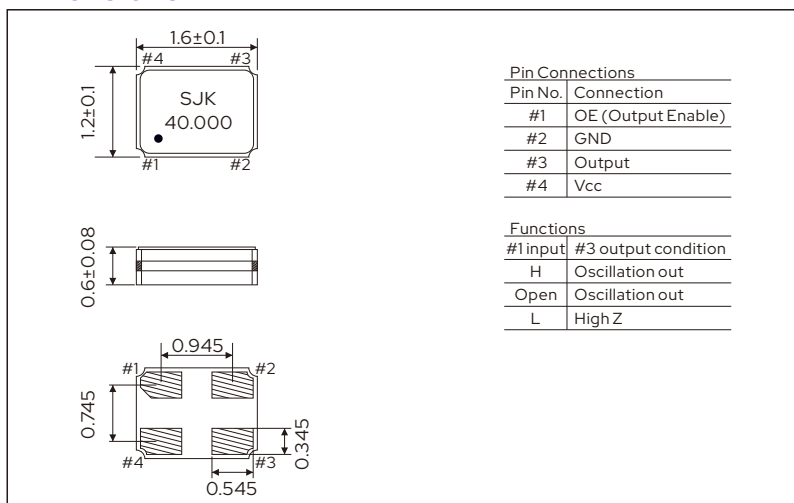

Recommended Land Pattern [mm]

